


JST-2400 Intelligent Access Control System



- On-Line Controller 가
- 2 Card Reader 2 Door 1 Door In/Out 가
- In/Out Anti-Passback
- 2 Door Lock Relay, 6 Input Monitoring 가
- Exit Device
- Door Contact
- 3,000 , 2,000
- Magstripe, Wiegand, Proximity Reader
- 128 TimeZone, DoorZone 가
- TimeZone 가
- Time Schedule 가
- Memory Backup Battery Data가

Size	Event – 80k RAM, Data – 48k RAM
DoorZone	128
TimeZone	128
	RS232C, RS422, Tcp/Ip(Optional)
	9,600Baud
	DC 12V 1.2A (Door Lock)
	0 ~ 70
	20% ~ 95% RH
	390(W) x 430(H) x 100(D) mm

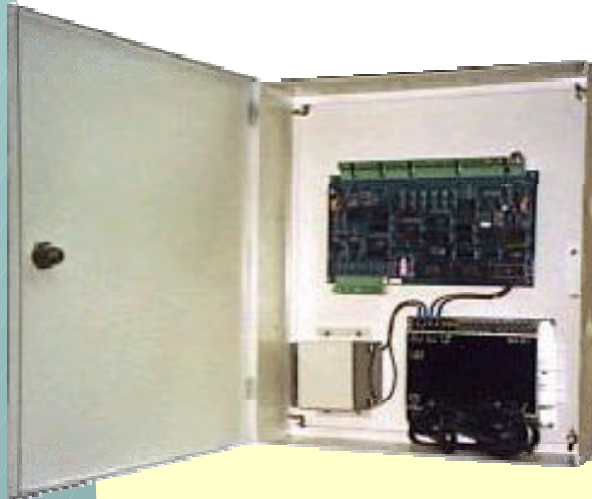